


IMPACT CRUSHER DETAIL


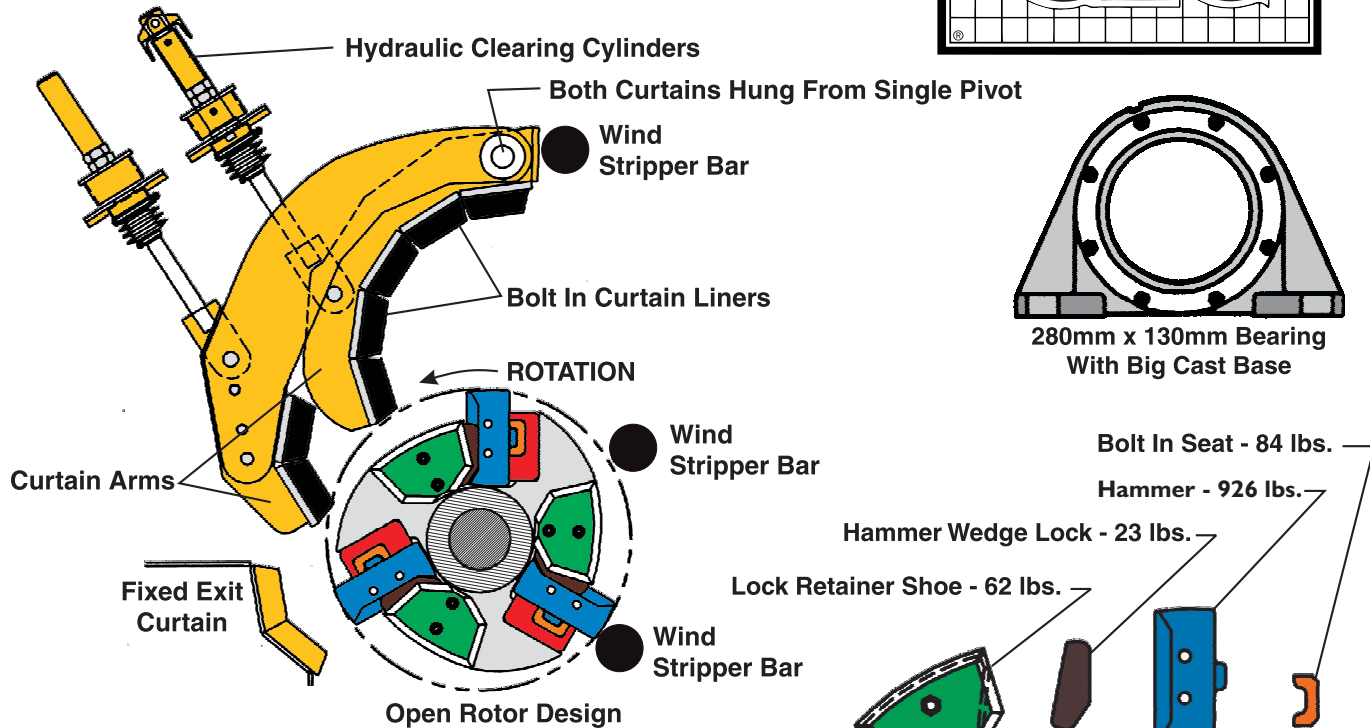


HAMMERS


- 25% CHROME
 - Limited Re-Bar
 - Long Wear Rock Material
- 12% CHROME
 - Recycle With Re-Bar

CURTAIN LINERS

- 25% CHROME
 - Standard Duty Rock - Recycle
- 12% CHROME
 - Re-Bar - Recycle
- 3% CHROME
 - Excessive Steel
 - Blue Rock Type Material

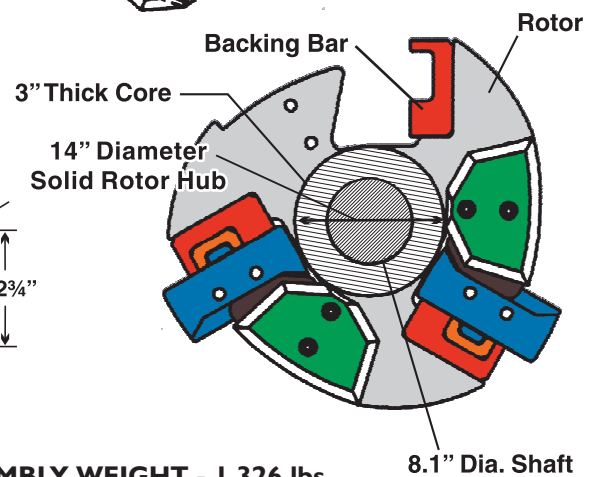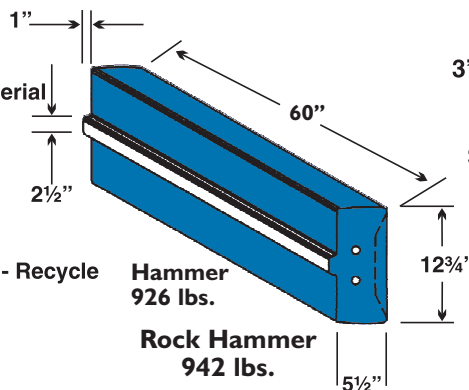

TOTAL BLOW BAR ASSEMBLY WEIGHT - 1,326 lbs.

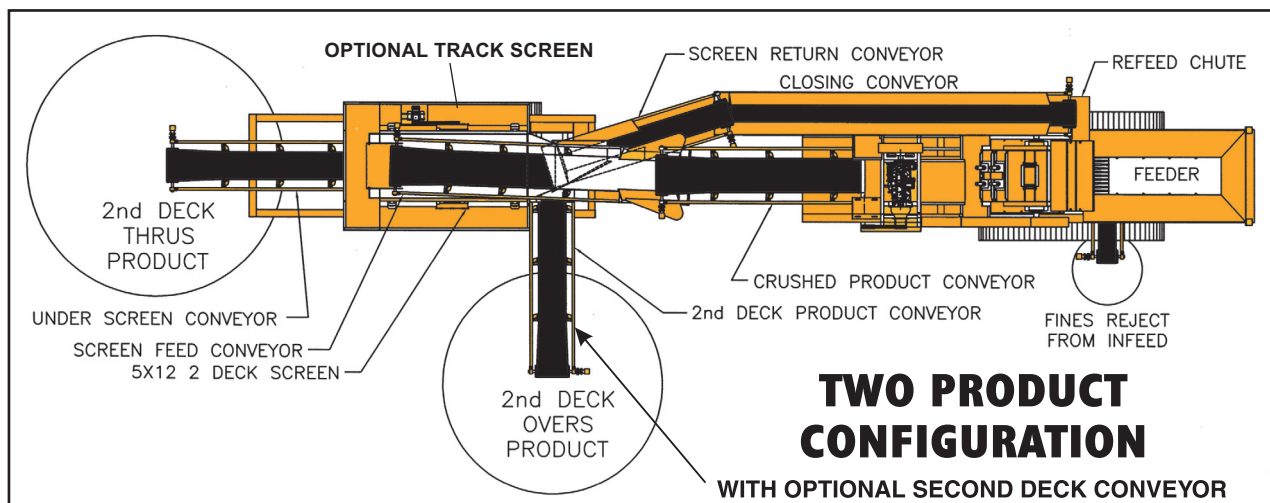

CEC-BUILT DIESEL POWER UNIT



- Caterpillar® C11 Tier III
- 350HP @ 1800 RPM
- Rear Engine Power Take-Off
- Charge Air to Air Radiator
- All Bolted Radiator
- Dual Stage Air Cleaner with Turbo II Pre-cleaner
- Quiet Muffler with Rain Cap



Auto Start button prevents over speed clutch engagement. System pulses clutch to engage properly.

Locking, digital engine control panel.

Rear engine, gear driven, power take-off, provides full time hydraulic pump drive. Clutch functions are independent of REPTO drive.




HYDRAULIC CLUTCH

THE CLUTCH IS MADE IN AMERICA


Push button engagement, self adjusting and hydraulically actuated. Will not start if engine speed exceeds 800 RPM.



COUNTER
ROTATING
TURN



TURN
PIVOT
POINT



PIVOT
TURN